

Straight Jib Boom

Snorkel




- 71ft. max. working height
- 56ft. max. horizontal reach
- 150° hydraulic powered platform rotation
- Driveable at full height
- Proportional control of drive, lift and swing
- 4 wheel drive

TB65J

TB65J straight jib boom specifications

	TB65J
max. working height	71ft.
max. platform height	65ft.
horizontal reach	56ft.
platform capacity (SWL)	500lb.
platform size	36in x 96in
platform rotation	150°
overall width	7ft.11.5in.
operational width	7ft.11.5in.
overall length B	33ft.
lowered height A	8ft. 9in.
min. transport length	33ft.
gross weight	25,000lb.
max. drive speed (lowered)	3.0mph.
ground clearance	13in.
gradeability (theoretical 4x4)	78%
tires	foam filled, 12ply 15" x 19.5"
drive system	4 wheel drive
controls	proportional control of drive, lift and swing
power source	gas or diesel

DANGER: Models described in this brochure are NON-INSULATED and do not provide electrocution protection from contact with or close proximity to energized conductors which is pointed out on decals and placards attached to the machine. Only qualified and trained operators are to be authorized to use and operate a work platform. Aerial work platforms must be elevated only on firm, level surface. Products in this brochure comply with applicable ANSI Standards. This literature is for illustrative purposes only. Consult Operating Maintenance and Parts Manuals for proper procedures. Specifications may vary and are subject to change without notice or obligation.

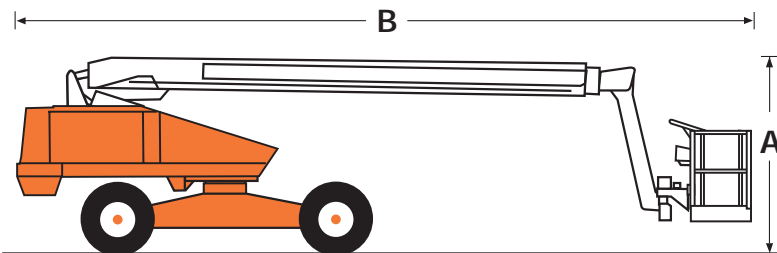


BP1 - TB65J USA 2/09

standard features

- 150° hydraulic powered platform rotation
- 4 wheel drive
- Proportional control of drive, lift and swing
- Foam filled lug tires
- Driveable at full height
- Drive motion alarm
- Amber beacon
- Operator horn
- 1 year parts and labor warranty
- 5 year structural warranty

options

- Hydraulic powered A/C generator 110V/2000w
- Airline to platform
- Glazier package
- 12K generator / welder package
- Cold weather package
- Light package
- Extreme environment package
- Tow package
- 96in. x 30in. aluminium platform - 600lb. capacity

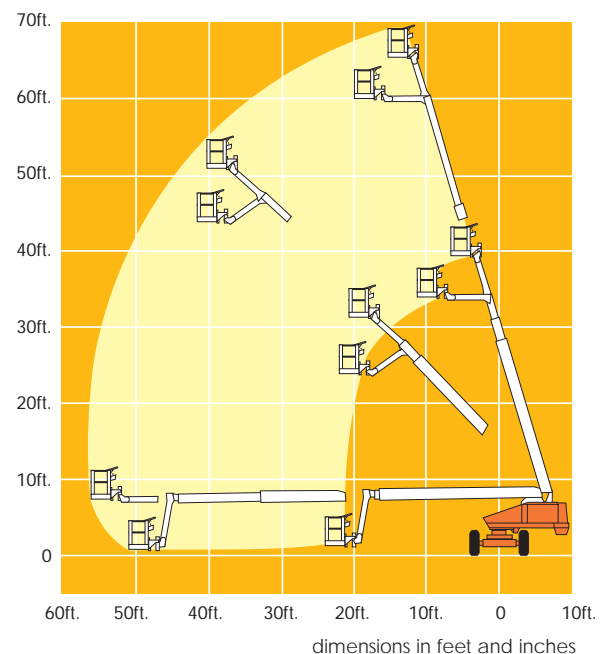

Snorkel
www.snorkelusa.com

PO Box 1160, St. Joseph, MO 64502-1160, USA
Tel: +1 (785) 989-3000 Toll Free: +1 (800) 255-0317
Sales fax: +1 (785) 989-3070 Parts fax: +1 (785) 989-3077

Meets or exceeds applicable requirements of OSHA, ANSI A92.5-2006 and CSA B354.4-02

CE This product is available with the CE mark confirming compliance with all relevant European Machinery Directives

manufactured by
Snorkel
INTERNATIONAL